



KTE Series Electrical Isolator

IP66 Weatherproof Isolator

Your Engineering Partner



ISOTECH's IP66 Weatherproof Series:

With IP66 protection, **ISOTECH** KTE Series is suitable for harsh environments.

Glove-Friendly Lever Operation & Tagout Feature:

The lever design is compact, neat and it is easy to operate even with gloved hands.

Tagout feature in the off position for greater safety and no electricity during maintenance.



KTE Series Features

- Overall Dimensions 165H x 82W x 92D (included lever)
- Captive Combination Head Screws for your choice of Screwdriver
- Large 16mm² Cable Conductor Terminals
- Steel plated terminals screws will never break
- Large padlocking capacity – suit industry 6mm padlock
- **Without** interlocking system
- Premium molding materials, chemically resistance and UV protection
- Made in Malaysia with Certified certificate



LISTED ON EMAL






Technical Data

Specification	Detail
Standard Specification	IEC 60947-1
	IEC 60947-3
Number of Poles	2P, 3P + N, & 4P
Rated Operational Current I _e (A)	20A, 35A, & 63A
Rated Operational Voltage U _e (V)	240/440
Rated Insulation Voltage U _i (V)	440V
Rated Impulse with stand Voltage U _{imp} (kV)	6kV
Rated Frequency	50/60Hz
Ingress Protection	IP66


Model Variants and Physical Data

No.	Model	Number of Poles	Current Rating (A)	Weight (kg)
1	KTE220	2	20A	0.345
2	KTE235	2	35A	0.345
3	KTE263	2	63A	0.345
4	KTE320	3	20A	0.381
5	KTE335	3	35A	0.381
6	KTE363	3	63A	0.381
7	KTE420	4	20A	0.405
8	KTE435	4	35A	0.405
9	KTE463	4	63A	0.405

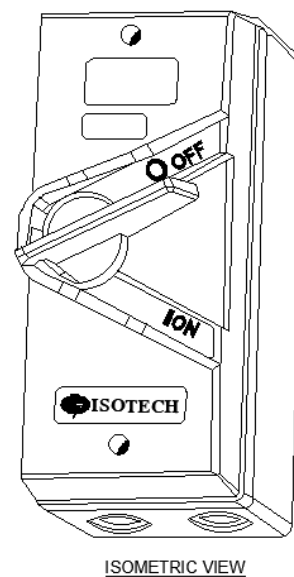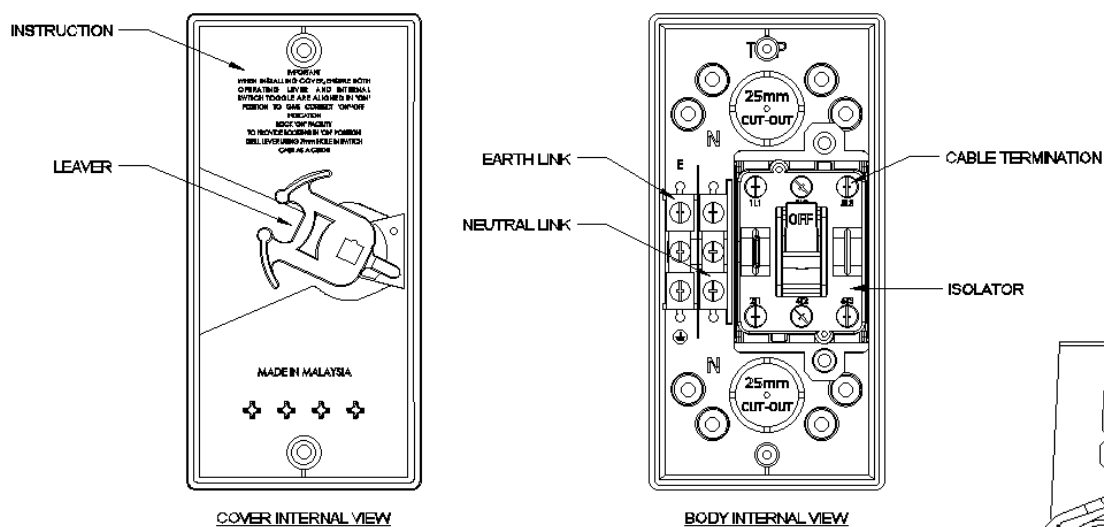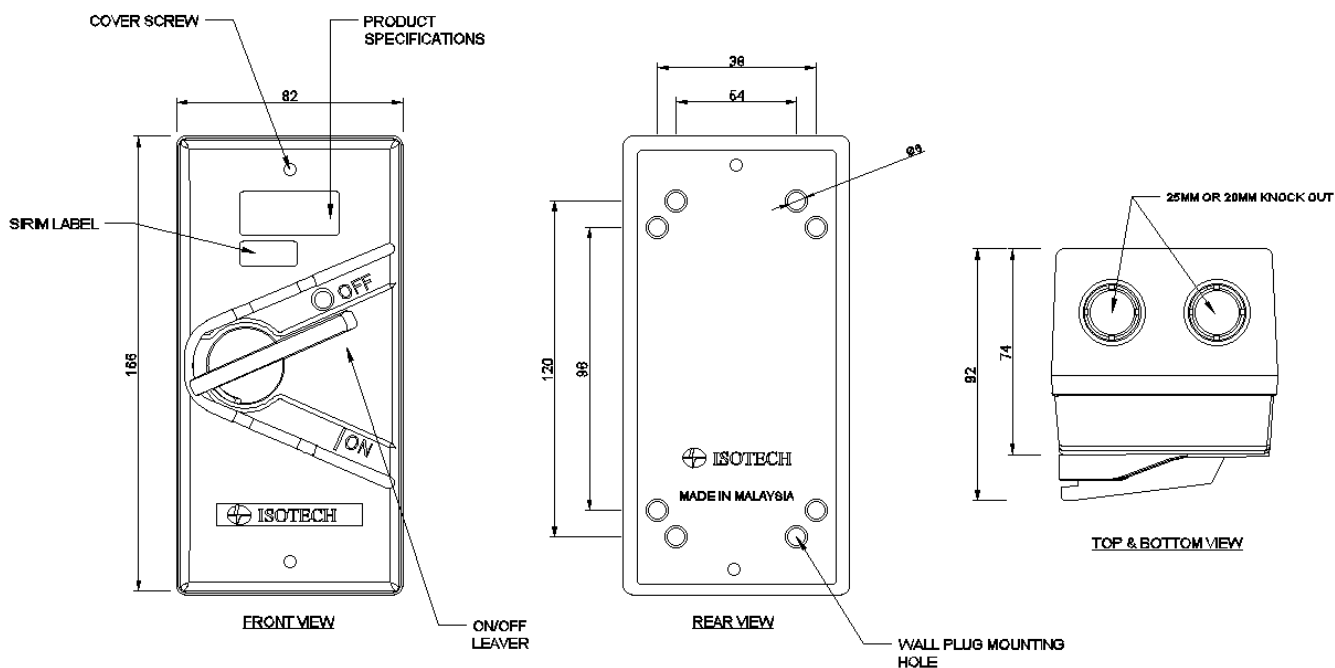

DRAWING

[illegible]

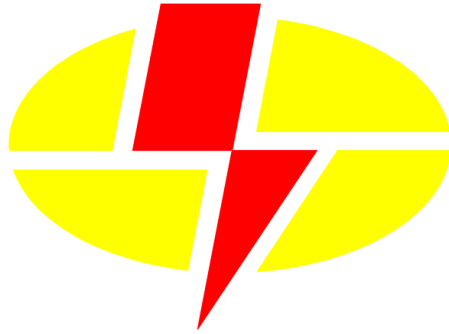

ISOTECH

Your Engineering Partner



+603 - 2201 9263



+6012 - 330 2767



www.isotech.my



**No.7, Jalan Platinum,
Off Jalan Balakong Jaya 2
Tambahan,
43000 Kajang, Selangor,
Malaysia.**